



Installation Instructions: Outback Fog Lamp Kit


PART.No H451SAG000

IMPORTANT



1. The installation should be carried out by an authorized Subaru dealer.
2. Take care not to damage any vehicle components during the installation process.
3. Route the wiring so that it cannot be abraded against any sharp edges.


Installation drawing

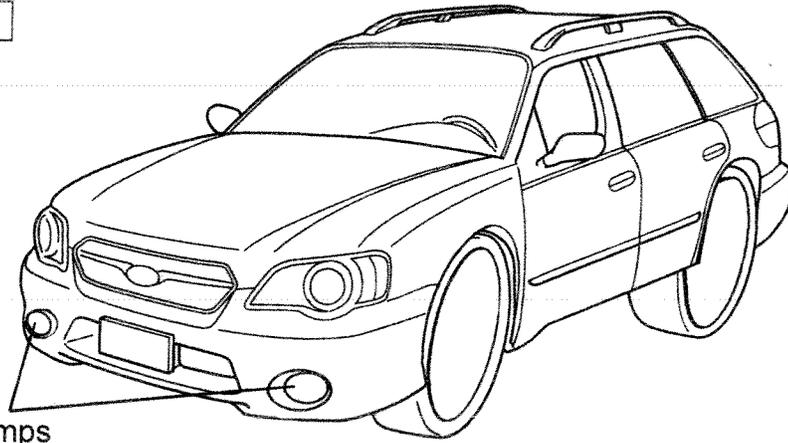


Fog lamps

Components


| No. | Part | Qty | No. | Part | Qty |
|-----|---------------|-----|-----|---------------------------|-----|
| ① | Fog lamp (RH) | 1 | ⑤ | Clip | 4 |
| ② | Fog lamp (LH) | 1 | ⑥ | Installation instructions | 1 |
| ③ | Switch | 1 | ⑦ | Relay | 1 |
| ④ | Nut | 4 | | | |

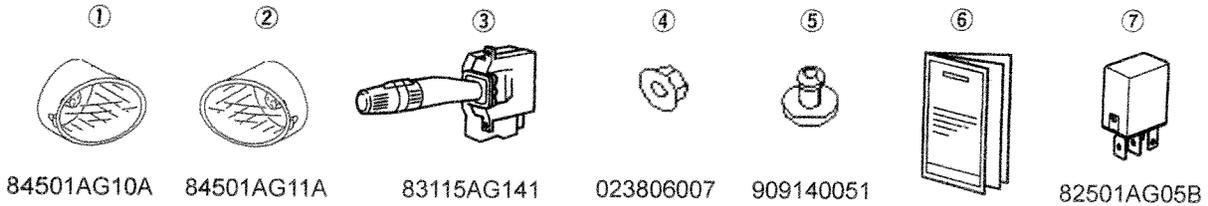

Tools




1




Disconnect negative terminal from battery.

2

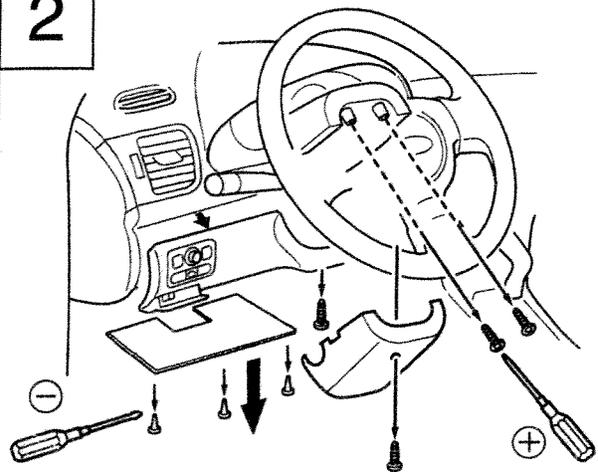


Remove lower dashboard panels.
Remove lower and upper steering column covers.

3

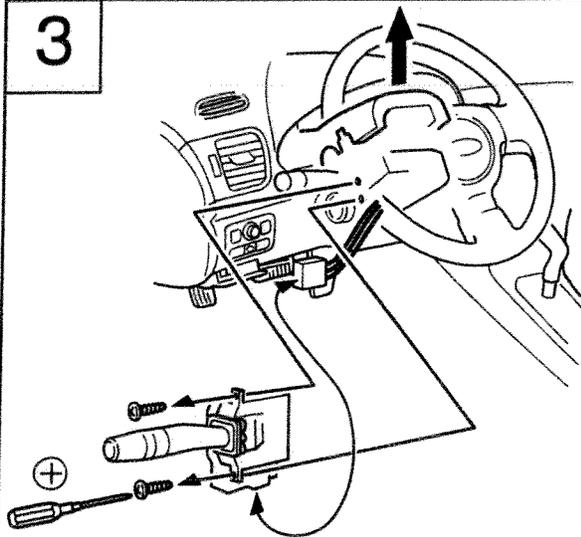


Remove turn signal stalk.

4

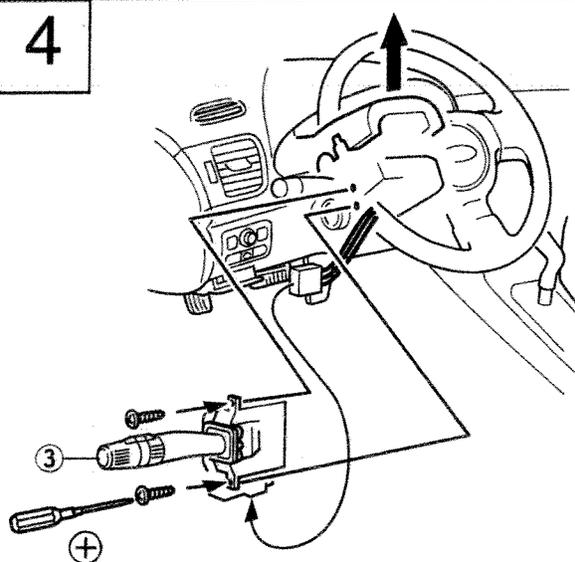


Install new turn signal stalk.

5

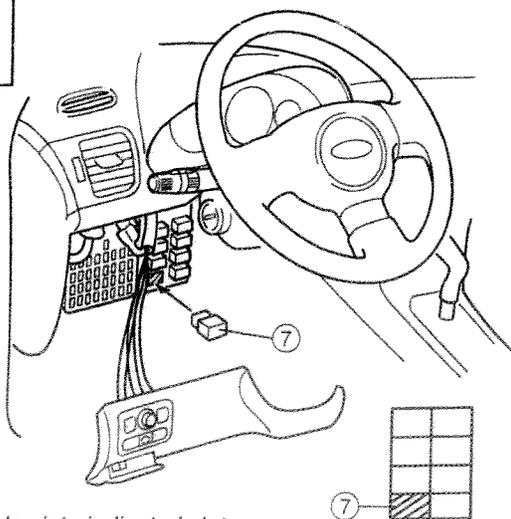


Insert relay into indicated slot.
Replace lower and upper steering column covers.
Replace lower dashboard panels.

6

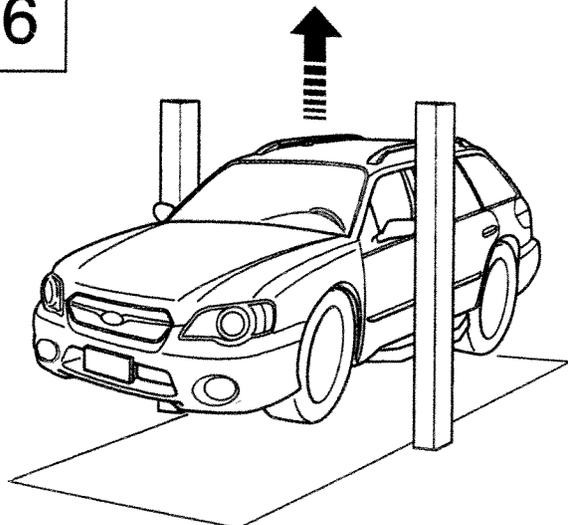


Safely raise vehicle.

7

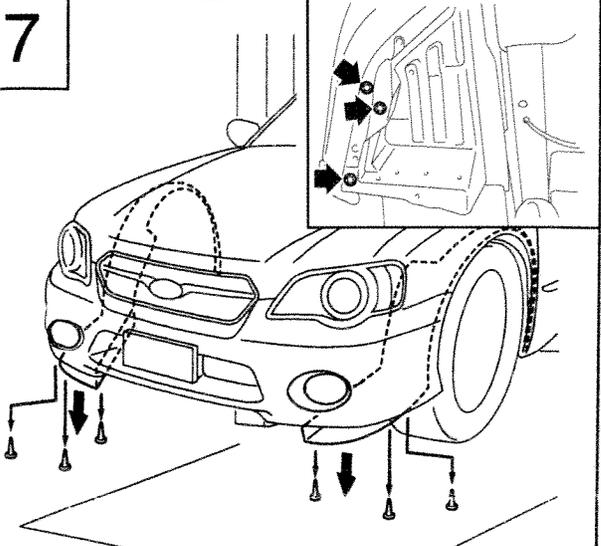


Remove indicated clips. Lower splash shields for access.

8

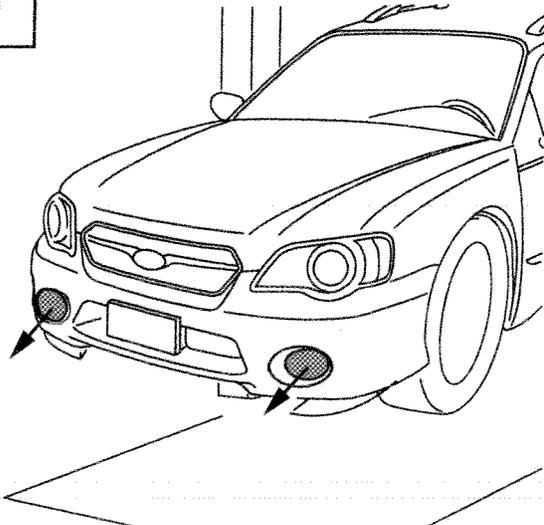



Remove fog lamp blanks.

9

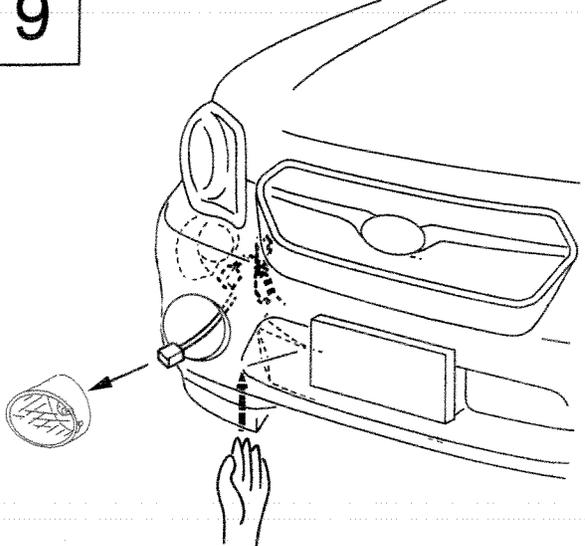


Obtain fog lamp harness from behind bumper cover. Connect to back of fog lamp. Repeat for other side.

10

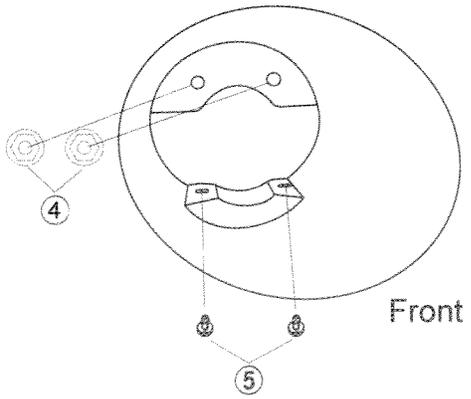


Front

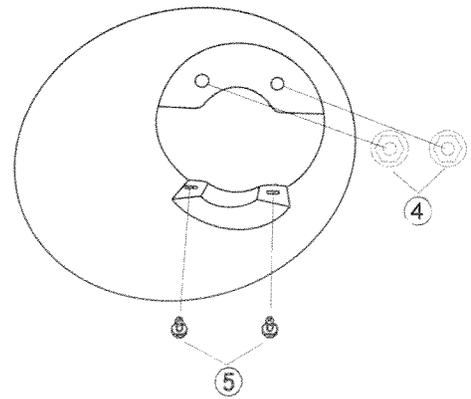


Attach each fog lamp with 2 clips and 2 nuts. Ensure that the wiring harness is not crushed.

11

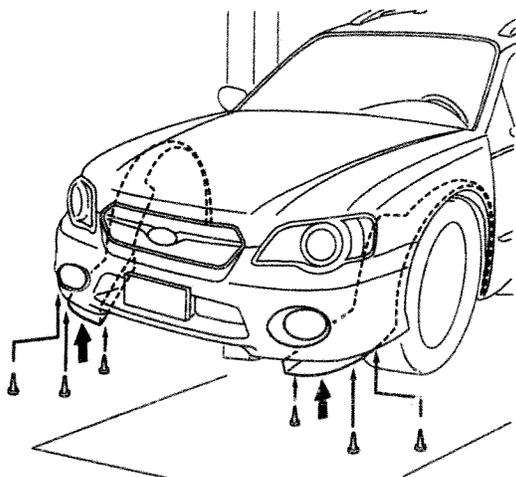



Replace splash shields.

12



Reconnect negative terminal on battery.

13

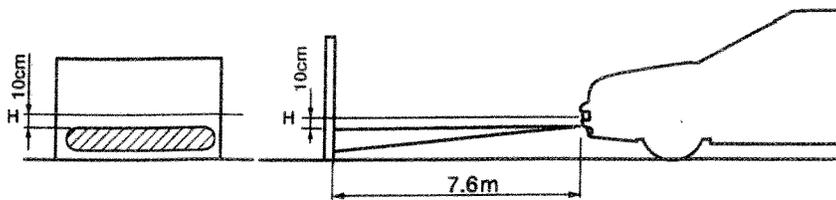

Aim fog lamps.